


# 280W SOLAR MODULE CSUN 290M



- 100% CSUN 셀 내장
- 혁신적인 광전지 기술력을 근간으로 하는 고효율 실현
- 제품에 대한 5년 보증기간
- 모듈전원출력에 대한 25년 보증기간
- 최고수준의 서비스 네트워크

## Specifications

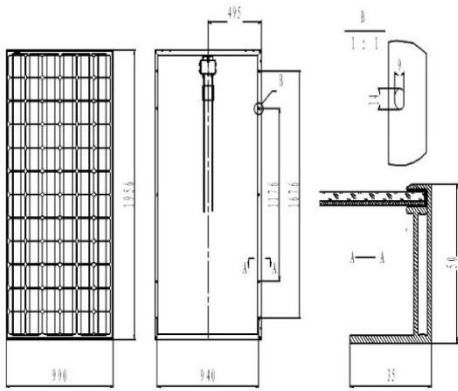

Dimension9	Number of Cells	Cell Size
1956 x 990 x 50mm (L x W x H)	72 pcs (6 x 12)	Monocrystalline (156 x 156mm)

## Characteristics

Type	CSU N300 M-24	CSU N295 M-24	CSU N290 M-24	CSU N285 M-24	CSU N280 M-24	CSU N275 M-24	CSU N270 M-24
Peak Power [W]	300	295	290	285	280	275	270
Voc [V]	44.8	44.6	44.5	44.4	44.2	44.1	43.9
Isc [A]	8.8	8.73	8.68	8.59	8.53	8.46	8.39
Vmp [V]	36.1	35.9	35.8	35.7	35.5	35.3	35.1
Imp [A]	8.32	8.22	8.11	7.99	7.89	7.8	7.7

## Other Parameters

Max System Voltage	1000V(IEC)	
Temperature Coefficient of Voltage	-0.36%/K	
Temperature Coefficient of Current	0.03%/K	
Temperature Coefficient of Power	-0.55%/K	
Just for Reference		
NOCT	45°C	
Fuse Current	15A	
Mechanical Load	Not less than 2400Pa	
Basic Structure	Front Side	Tempered Glass
	Back Side	Composite Film
	Frame	Aluminum Alloy

제작사 : China Sunergy Co., Ltd  
 No. 123 Focheng West Road Jiangning Economic & technical Development Zone, Nanjing 211100, China  
 Tel ) +86-25-52766681 Fax) +86-25-52766767 E-mail) sales@chinasunergy.com



수입판매 : (주)이제이텍  
 성남시 분당구 구미동 204-5 석정빌딩  
 Tel ) 031-711-4880 Fax) 031-712-6311 E-mail) CMLEE@ejtech.net

